

DECESPUGLIATRICE IDRAULICA

LS7 REV


HYDRAULIC HEDGE TRIMMER



KF5
Max ø 6 cm



HF6
Max ø 8 cm

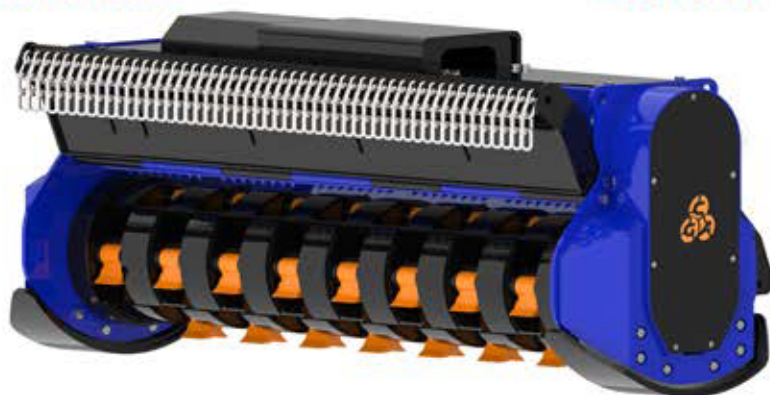

HF11-HF13
Max ø 25 cm



HF14
Max ø 25 cm

Modello - Model				Cilindrata	Bar min/max	Oil L/min		
LS7 1300 REV	10/12,0-25,0	1300	650	40-50-63	200-350	100-125-160	1x50mm	160-80-85
LS7 1600 REV	12/15,0-25,0	1600	750	40-50-63	200-350	100-125-160	1x50mm	190-80-85

CARATTERISTICHE TECNICHE E DOTAZIONI STANDARD

- Trasmissione monocinghia dentata preallungata HTD ad alte prestazioni.
- Cofanatura interna a doppia cassa con intercapedine.
- Protezione carter cinghie.
- Trinciatrice simmetrica per un taglio più veloce con la rotazione dell'escavatore.
- Bocche d'ingresso e d'uscita completamente identiche.
- Cofani regolabili idraulicamente, apribili completamente per una maggiore capacità di taglio.
- Supporti rotore interni con labirinto per la protezione dei cuscinetti dalle impurità.
- Cuscinetti orientabili di prima qualità.
- Blocco valvole comprensivo di valvola prioritaria per regolazione della portata olio, antiurto (valvola di max pressione), anticavitazione.
- Motore a pistoni.
- Protezioni antinfortunistiche con catene a norma CE.

TECHNICAL FEATURES AND STANDARD EQUIPMENT

- Toothed high-performance belts transmission.
- Internally reinforced with inside double-case body with interspace.
- Protective belts-cover.
- Shearing symmetric head, for a faster working by the excavator rotation.
- Input and output mouths completely identical, adjustable
- Hydraulic hoods, fully openable for higher cutting capacity.
- Inside Rotor Supports with "labyrinth" for the protection of the bearings by the impurities.
- Adjustable bearings of 1st quality.
- Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation.
- Piston motor.
- Accident prevention chains protections according to EC directives.

Rotore elicoidale



Helicoidal Rotor

Rotore forestale mazze a scomparsa



Forestal rotor wood flanged

Rotore forestale a denti fissi



Forestal rotor fixed teeth

ACCESSORI

- Apertura meccanica cofano 1
- Apertura meccanica cofano 2

ACCESSORIES

- Hood 1 mechanical opening
- Hood 2 mechanical opening

